


NOTES:

1. Input - 115 Volts 60 Hz Standard. Also available 230 Volts and 50 Hz.
2. Display uses RED Light Emitting Diodes.
3. Colons - Displays furnished with colons which flash at 1 Hz rate.
4. PM Indicator - 12 Hour display only has PM time indicator given by dot.
5. Power Failure Indication - indicated by entire display flashing at 1 Hz rate. Pushing FAST or SLOW set controls cancels this indication.
6. Panel Finish - Matte Black

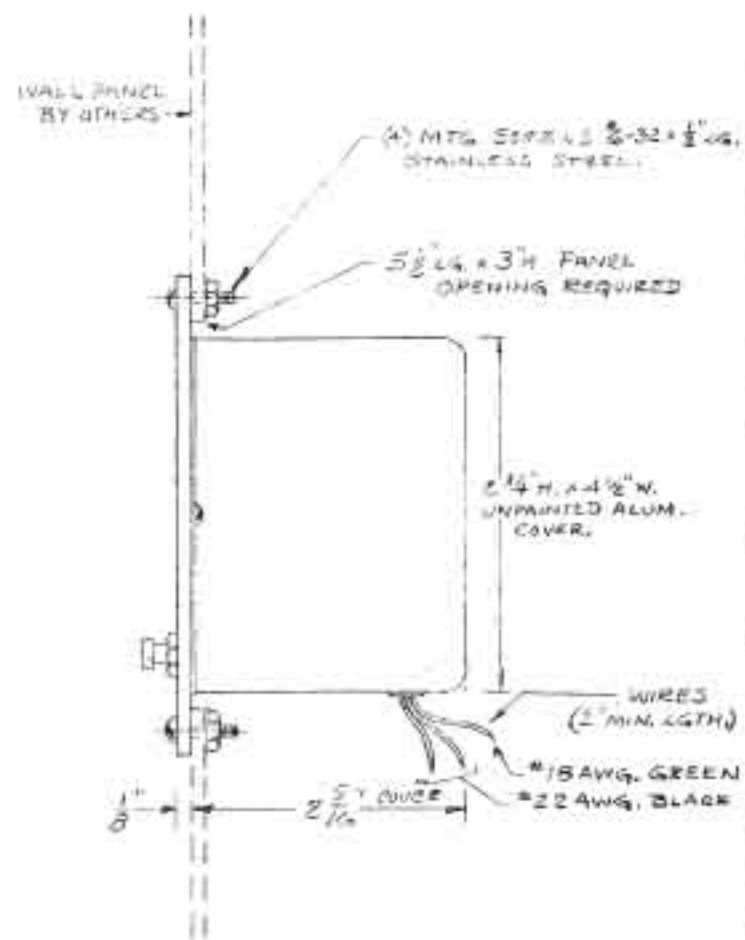

Rev D Removed SA Finish - 10.18.2004

REV C REVISED NOTE 3

REV B DETAILS ADDED

REV A ADDED CREATING DRILLING - 2 1/2" = 2 1/2"

JMR 3-19-81

JME 3-6-79

PDC8412 & PDC8424 PANEL MOUNTED DIGITAL CLOCKS

DRAWN	APP'D.	SCALE	DATE	DRAWING NO.
JMR		~	3-7-77	A-3298
ELECTRIC TIME CO. INC. NATICK MASS.				