#4MI TOWER CLOCK MOVEMENT

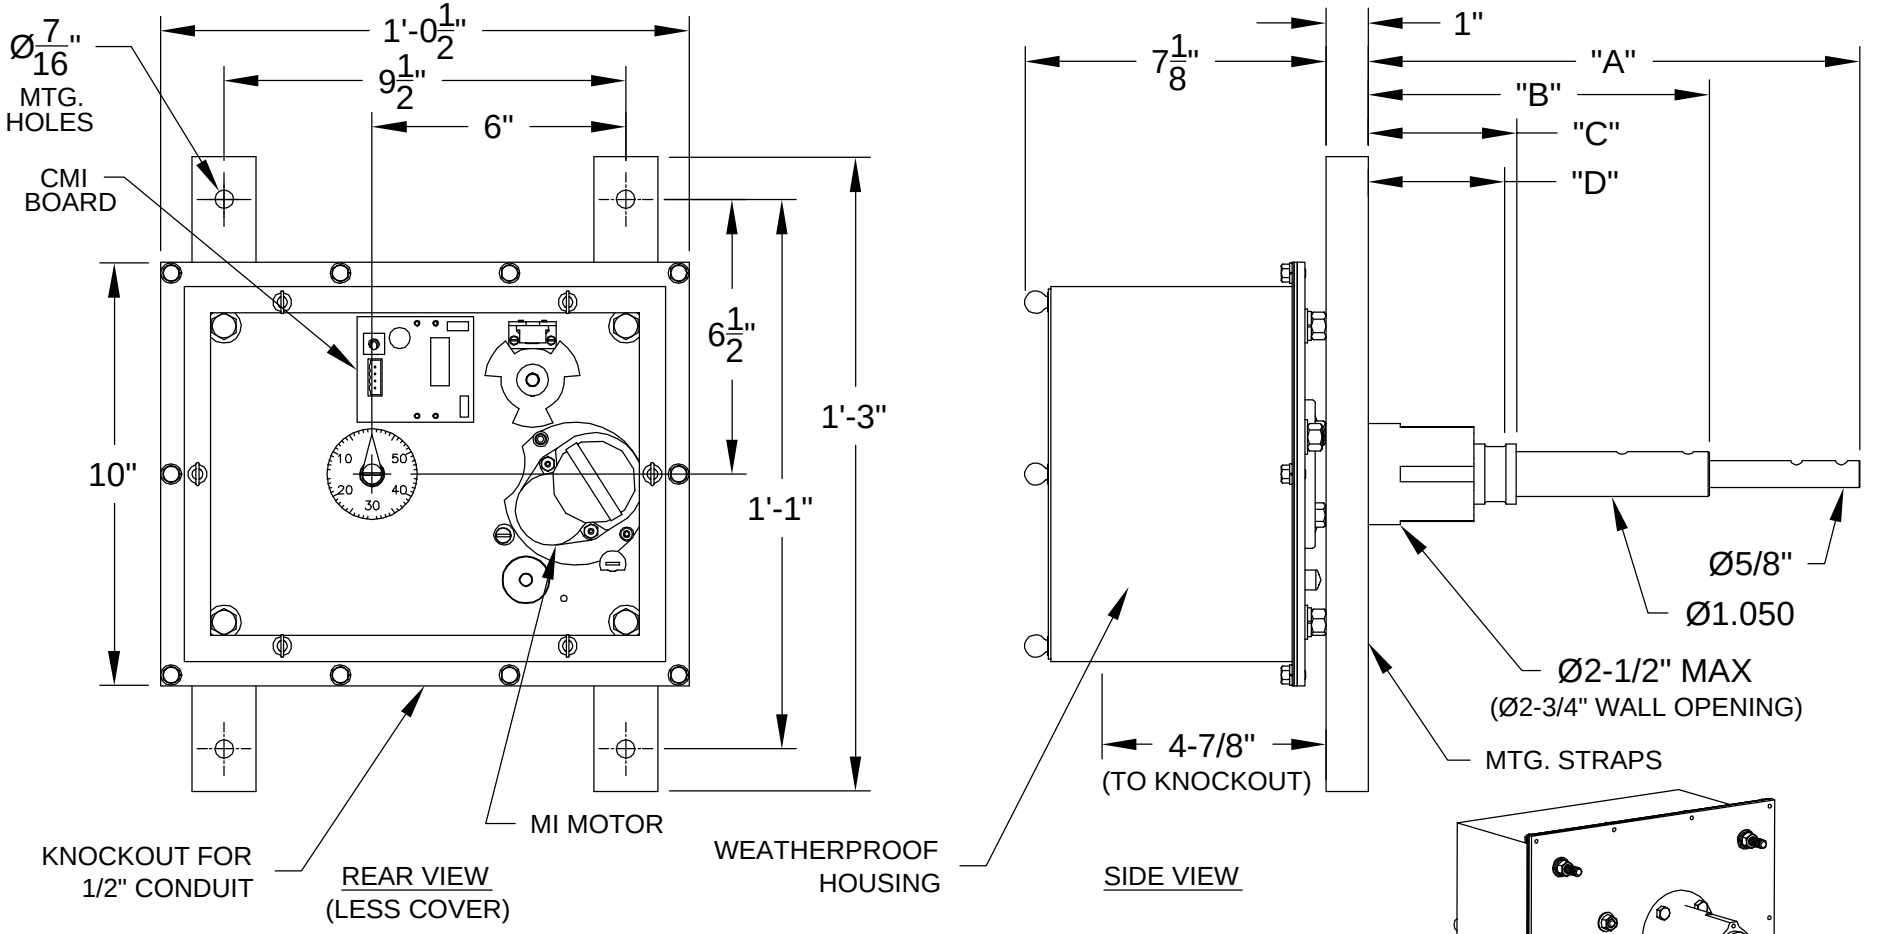

MECHANICAL SPECIFICATIONS

1) UP TO Ø15' DIAL WITH UNPROTECTED HANDS
2) HAND DESIGN AND CLOCK LOCATION WILL AFFECT MAX DIAL SIZE. CONTACT FACTORY FOR DESIGN ASSISTANCE.

Note: Specifications subject to change without notice.

ELECTRICAL SPECIFICATIONS

1) 24VAC - 50/60 HZ - 300 mA - 7W (8 SEC/MIN RUN TIME)
2) ALTERNATING DRIVE SIGNAL MINUTE IMPULSE OPERATION (USING ELECTRIC TIME CO. 99A-MI CLOCK CONTROLLER)

MOV'T	"A"	"B"	"C"	"D"**	WEIGHT
#4G1-MI	11-5/8"	8-1/16"	3-1/2"	3-3/8"	62 LBS
#4G2-MI	17-3/8"	13-13/16"	9-1/4"	9-1/8"	69 LBS
#4G3-MI	23-5/8"	20-1/16"	15-1/2"	15-3/8"	83 LBS

**MAX DIAL + WALL THICKNESS