



FLUSH PANEL MOUNT & SURFACE MOUNTING CLOCKS

VAPOR, MOISTURE, & DUST TIGHT

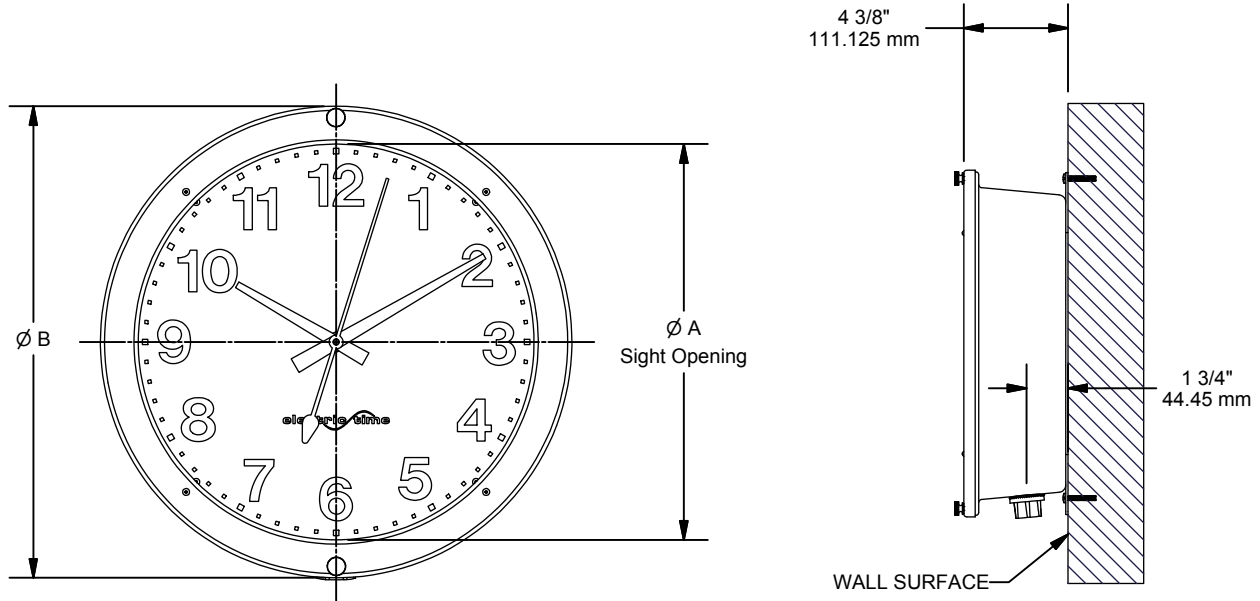

SURFACE MOUNTING

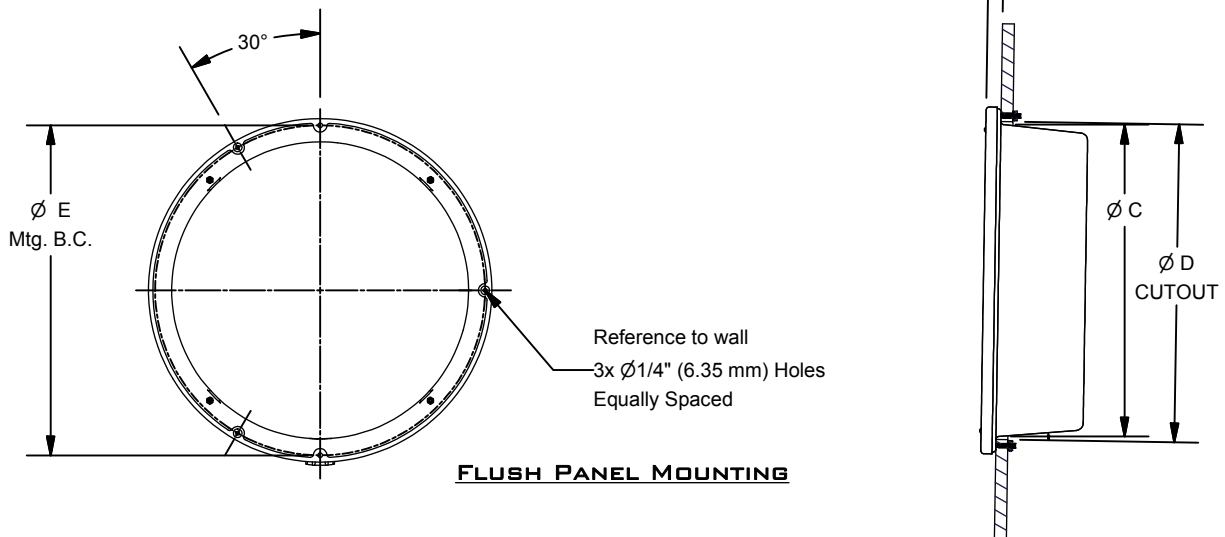

FLUSH PANEL MOUNTING

STYLE	SIZE	A	B	C	D	E	SHIPPING WT. (LBS.) / (KG.)
VG2506	6"	5-3/4" 146.05 MM	7-9/16" 192.087 MM	6-5/16" 160.373 MM	6-1/2" 165.1 MM	7" 177.8 MM	13 / 5.9
VG2508	8"	8-1/8" 206.375 MM	10-1/16" 255.587 MM	8-13/16" 223.837 MM	9" 482.6 MM	9-1/2" 241.3 MM	18 / 8.2

SPECIFY WHETHER SURFACE OR PANEL MOUNTING
 STYLE G-MONITOR DIAL MARKINGS & CLOCK HANDS WITH BLACK PAINTED FINISH
 FLEXIBLE LEADS APPROX. 6" LONG EXTENDED FROM CONDUIT
 PROVIDE 2 WIRE CIRCUIT, COLOR CODED BLACK & WHITE
 6" CLOCK HAS FEMALE FITTING AT BOTTOM
 1 15V/60HZ SINGLE SYNCHRONOUS MOVEMENT. 230V/50HZ OPTION AVAILABLE

**NOTE: SPECIFICATIONS
 SUBJECT TO CHANGE
 WITHOUT NOTICE.**